

# Mead-Hatcher

A MARTIN YALE BRAND

## INSTALLATION INSTRUCTIONS FOR UNDER-COUNTER KEYBOARD DRAWER WITH WRIST REST PAD

*Computer Comfort Makes Good Business Sense™*

**For Use With Ergonomic Design Keyboards:**  
**Fits: Microsoft® Natural®, Key Tronic® Flex Pro®**

**Note:** These units have been specifically designed to be used with the new ergonomically designed keyboards that have built-in wrist supports. A foam palm rest is included for use when using a standard keyboard.




**TOOLS REQUIRED:** Phillips Screwdriver, Drill with 3/32" bit, Ruler, and Tape.

**YOUR CARTON WILL CONTAIN:**


(1) Articulating Keyboard Drawer	(1) Foam Palm Rest *
(4) #10 x 3/4" Wood screws	(1) Mouse Palm Rest

1. Place drawer assembly under work surface in desired location. Be sure to center the drawer in front of the terminal area. The *mounting brackets should be equal distance from the front edge of the work surface* to allow for the proper alignment and smooth slide action. Mark the location of mounting holes on the underside of the work surface. **WORK SURFACE SHOULD BE A MINIMUM OF 1" THICK FOR ENCLOSED SCREWS TO BE USED.** Remove keyboard drawer assembly.

2. Using tape, mark 3/4" depth on the 3/32" drill bit. (See Figure 1). This will keep you from drilling too deep and through the work surface. Drill the four mounting holes.

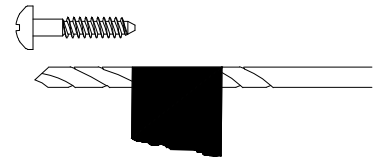

**Fig. 1**

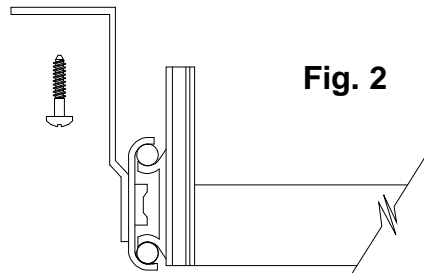

**Fig. 2**

3. Align the mounting brackets with the four drilled holes in the work surface, and anchor (snug, not tight) with four screws (See Figure 2). Test drawer for free travel by pulling drawer out and pushing drawer in. Securely tighten screws. Your installation is complete.

\* For maximum comfort when using a standard keyboard, a foam palm rest is included, along with a strip of double-sided adhesive tape, which may be cut and applied to each corner of the palm rest pad to secure in place.

### **TO ADJUST YOUR KEYBOARD DRAWER**

There are four knobs - two on each side of the keyboard drawer assembly. Each knob has an adjustment slot, allowing 2" of adjustment. Pull the keyboard drawer out to its fully extended and locked position. Drawer will lock out when the slides are fully extended and drawer is pulled out fully. Slightly loosen (do not remove) all four knobs for adjustment. Position the front edge of the keyboard drawer at the desired work height. Tighten the two front knobs just enough to hold the desired position. Position the rear of keyboard drawer in the desired angle, to best achieve neutral relationship of forearms, wrists and hands. You may also need to adjust your chair height.

**If further assistance is required, please call Customer Service at (260) 563-0641 and reference product #32030.**



251 Wedcor Ave. • Wabash, IN 46992

Phone: (260) 563-0641 • Fax: (260) 563-4575

Website: [www.martinyale.com](http://www.martinyale.com) • Email: [info@martinyale.com](mailto:info@martinyale.com)